

**Type** : 4EG132S4D-FC-B0-000**Date** : 01.01.2023

Power [kW]	: 5.50	Efficiency Class	: IE4
Input Voltage [V]	: 400	Duty Cycle	: S1
Connection Type [Δ / Y]	: Δ	Service Factor	: 1.25
Frequency [Hz]	: 50	Frame Size	: 132S
Pole Number	: 4	Weight [kg]	: 73.7
Nominal Speed [rpm]	: 1470	Insulation Class	: F [155°C]
Nominal Current [A]	: 11.1	Temperature Rise	: B [80°K]
Nominal Moment [Nm]	: 35.7	Protection Class	: IP55
Nominal Efficiency [η]	: 91.9	Vibration Severity Grade	: A
Power Factor [cosφ]	: 0.78	Method of Cooling	: IC411 (TEFC)
Locked Rotor Current [Ia/In]	: 7.7	Direction of Rotation	: Bidirectional
Locked Rotor Torque [Ma/Mn]	: 3.8	Balance	: Half Key
Breakdown Torque [Mk/Mn]	: 3.7	Motor Thermal Protection	: --
Motor Color	: RAL 7031	Altitude Above Sea Level	: 1000m
Ambient Temperature	: -15°C / +40°C	Sound Pressure Level [dBA]	: 61

**ELECTRICAL DATA**


Δ / Y	U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	η [%100]	η [%75]	η [%50]	Cosφ	Cl
Δ	400	50	5.50	1470	11.1	91.9	91.8	90.6	0.78	IE4
Y	690	50	5.50	1470	6.41	91.9	91.8	90.6	0.78	IE4
Δ	460	60	5.50	1770	9.70	92.4	92.1	90.7	0.77	IE4
Δ	460	60	6.38	1765	11.0	92.4	92.1	90.6	0.79	IE4

**MECHANICAL DATA**

Moment of Inertia [kgm <sup>2</sup> ]	: 0.03418
Bearing [DS / NS]	: 6208ZZ / 6208ZZ
Frame Material	: Cast Iron
Flange Type / Material	: B14 / Cast Iron
Cooling Fan Material	: Plastic
End Shield Material	: Cast Iron

**TERMINAL BOX**

Terminal Box Material	: Cast Iron
Terminal Box Position	: Top
Terminal Box Cable Entry	: M25x1.5
Terminal Box Blind Cap	: M25x1.5
Contact Screw Thread	: M5

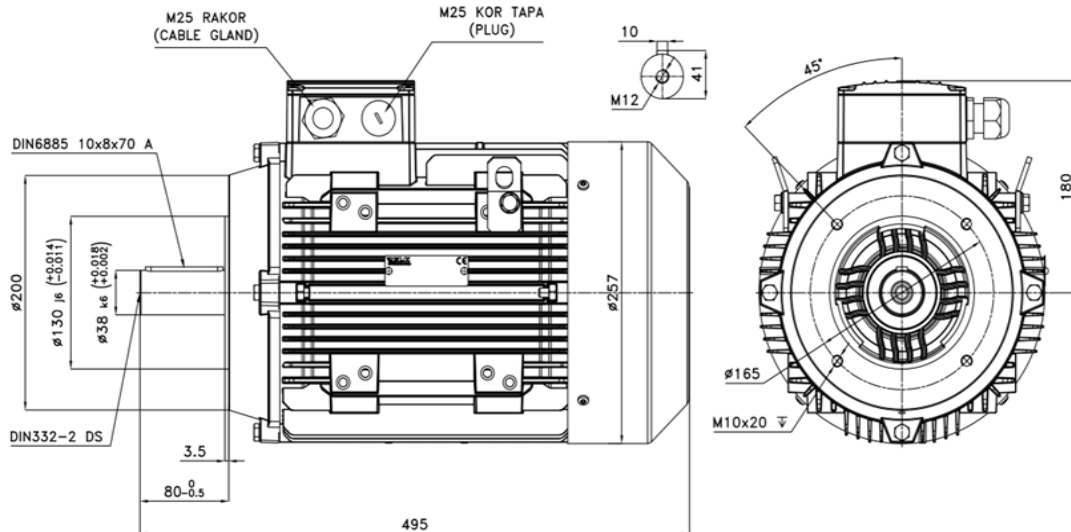**MECHANICAL DIMENSIONS**

Manufactured and tested in accordance with IEC 60034

\*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

\*ELK Motor has right to change all the data without prior notice.

FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023



ELK MOTOR SAN. ve TİC. A.Ş.  
www.elkmotor.com.tr  
+90 (282) 726 92 94

## TECHNICAL DATASHEET ACCORDING TO COMMISSION REGULATION (EU) 2019/1781 THREE PHASE INDUCTION MOTOR - SQUIRREL CAGE

Type : 4EG132S4D-FC-B0-000

Date : 01.01.2023


### NAMEPLATE DATA

Power [kW]	: 5.50	Nominal Speed [rpm]	: 1470
Nominal Voltage [V]	: 400	Nominal Current [A]	: 11.1
Connection Type [ $\Delta$ / Y]	: $\Delta$	Nominal Moment [Nm]	: 35.7
Nominal Frequency [Hz]	: 50	Nominal Efficiency [ $\eta$ %]	: 91.9

### THE POWER LOSSES AT SEVEN OPERATING POINTS ACCORDING TO COMMISSION REGULATION (EU) 2019/1781

Operating Point Number	Speed $n/n_N$ [%]	Torque $T/T_N$ [%]	Relative Power Losses $P_L/P_N$ [%]	Efficiency $\eta$ [%]
P <sub>1</sub>	90	100	9.5	90.5
P <sub>2</sub>	50	100	6.8	88.0
P <sub>3</sub>	25	100	5.9	80.9
P <sub>4</sub>	90	50	5.5	89.1
P <sub>5</sub>	50	50	3.7	87.0
P <sub>6</sub>	50	25	2.9	81.1
P <sub>7</sub>	25	25	1.8	77.8

### MAP OF RELATIVE POWER LOSSES $P_L/P_N$ [%]

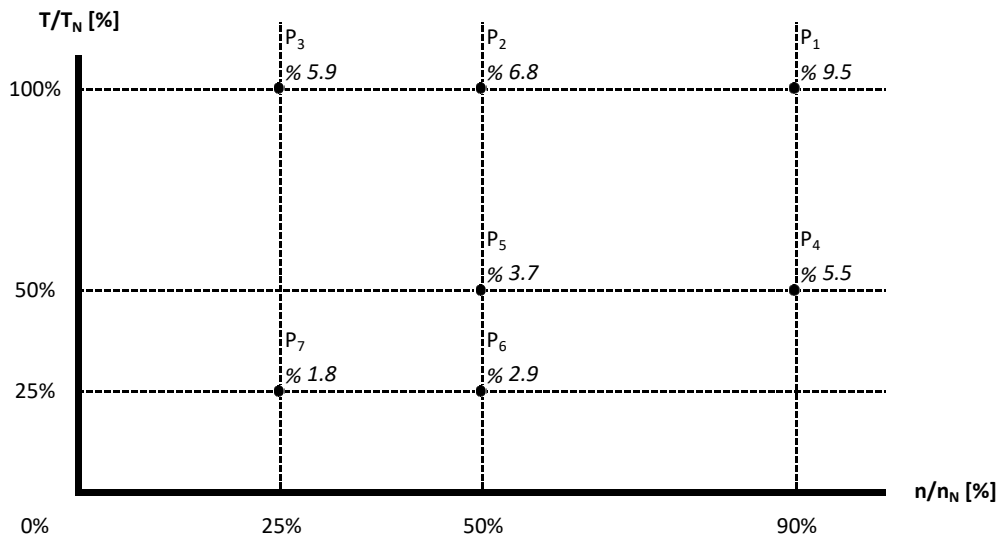

Manufactured and tested in accordance with IEC 60034


FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023

\*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

\*ELK Motor has right to change all the data without prior notice.

Motor Code : 4EG132S4D-FC-B0-000

### Torque and Current Curves Related to Speed

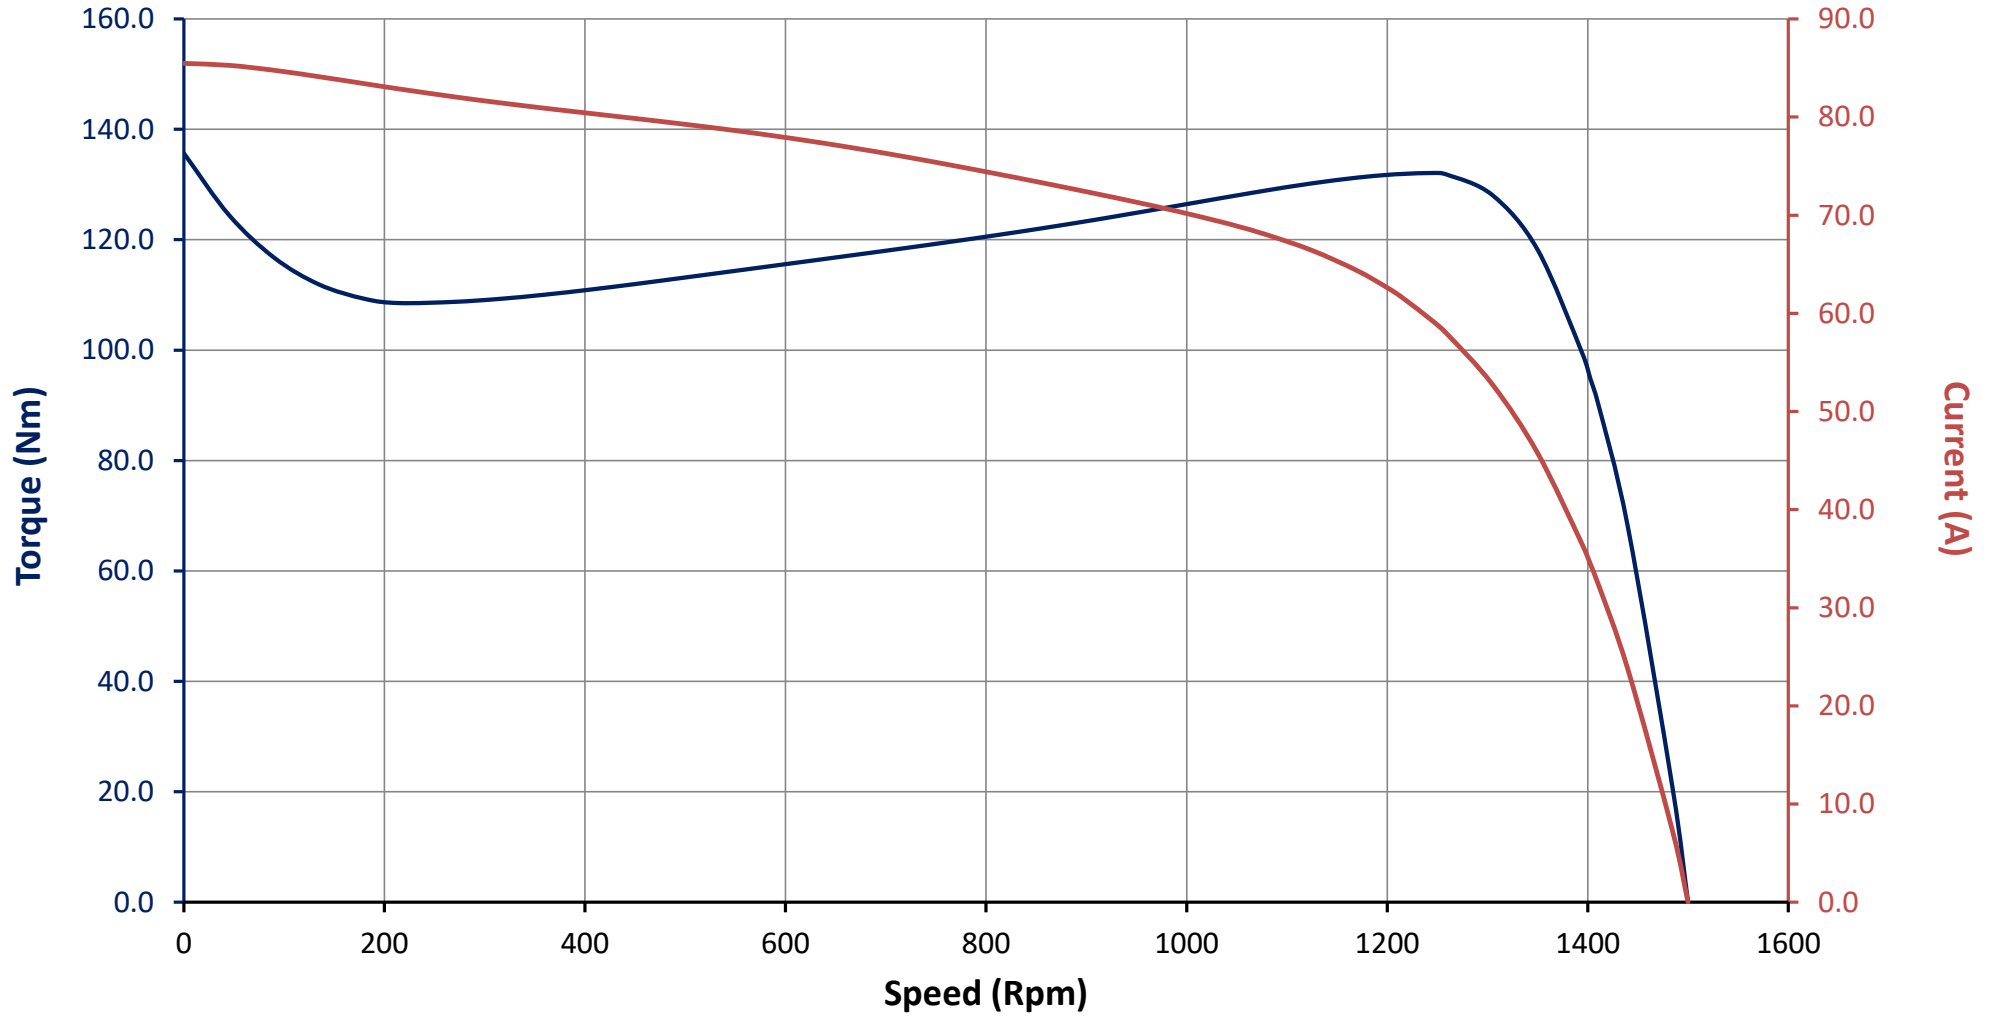

Motor Code : 4EG132S4D-FC-B0-000

### Performance Curves Related to Rated Output

